



Wi-Fi Connection Instructions

Before starting please ensure you have downloaded the latest version of Fronius Solar.Web App on your smart device. The App logo should look like the below image.



Fronius Solar.web 4+

Monitor your PV-system

[Fronius International GmbH](#)

★★★★★ 2.3 • 35 Ratings

Free


Please note: if you haven't changed your wifi access, modem password etc but your inverter has lost wifi connection/monitoring, please try shutting down the inverter – leave it off for 2mins – then turn it back on.

1. Press the third button on the inverter, 'back' button, which will take you back to the main menu of the inverter screen. Image below.





2. Press the second button 'forward arrow' to move through the menu options until you see the 'SetUp' option. Then press the forth button 'enter' to select it. Image below.

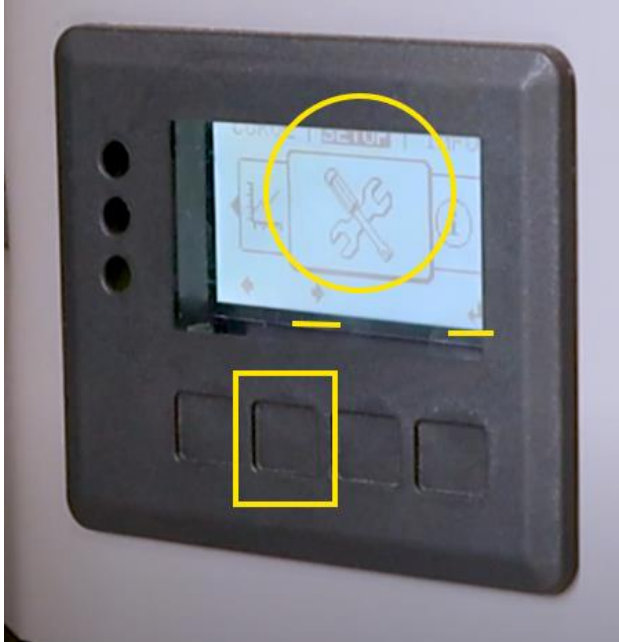

3. Using the down arrow button select enter on the "Wi-Fi Access Point". Image below.






4. Press the enter button to activate the Wifi Access Point. Image below.



5. Your inverter is now sending out a wifi signal and will show its wifi name and password. Image below.

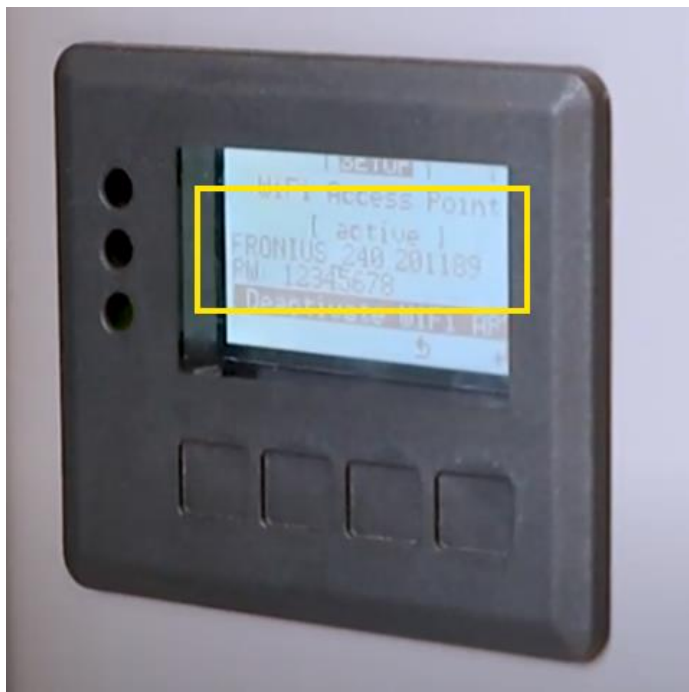



6. Now on your mobile phone. Go to 'Settings', 'Wifi', and you should be able to see the Fronius wifi network. The number will match what appears on your inverter. Example image below.




7. Select the network and then enter in the inverter password. It's the same for all Fronius inverters – Password; **12345678**






8. Your mobile phone should now be connected to your Fronius inverter. Image below.

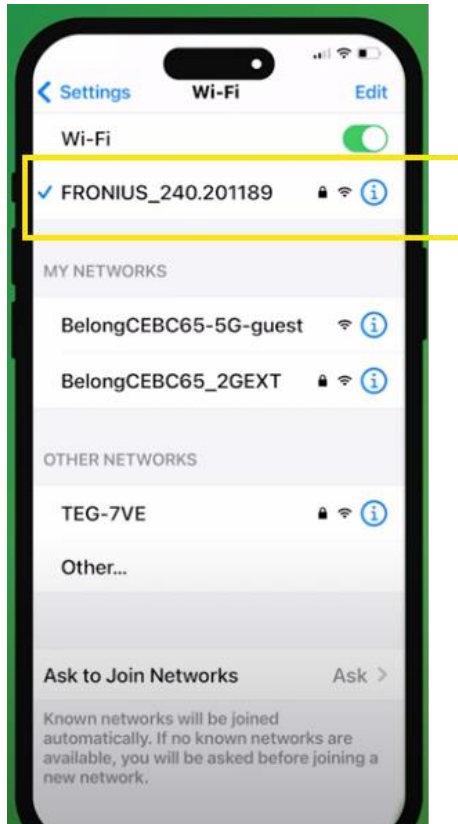


9. Open up a web browser on your mobile ie. Safari, Google etc. Type in the AP address – **192.168.250.181** press enter/go/search. Image below.

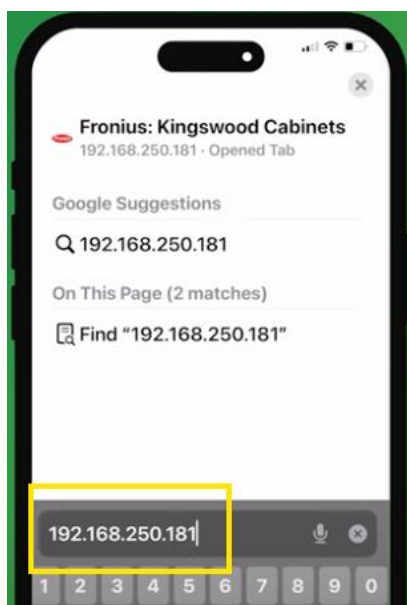




10. This will open up the setup wizard. Select the 'Settings' option.

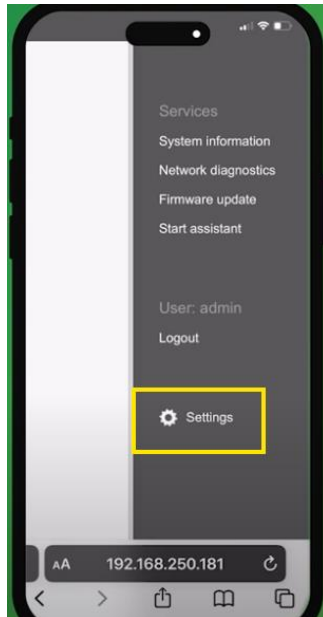


11. Select 'Network'.

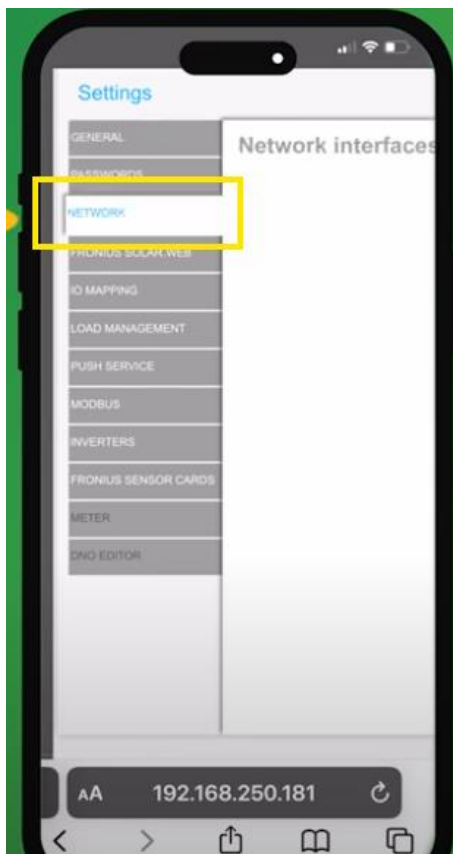




12. Select “Internet via WLAN”

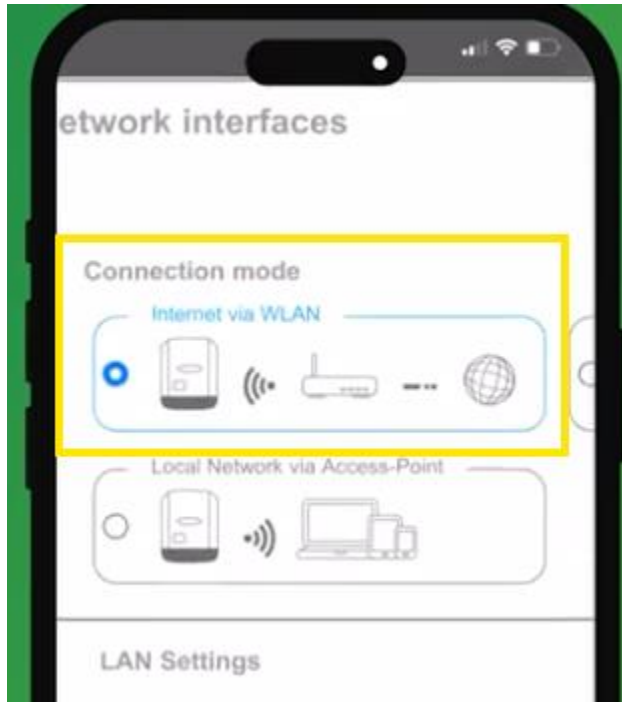


13. Select your home Wi-Fi network. Inverters work best connected to 2.4Ghz bandwidths NOT 5G. Click ‘Set’.

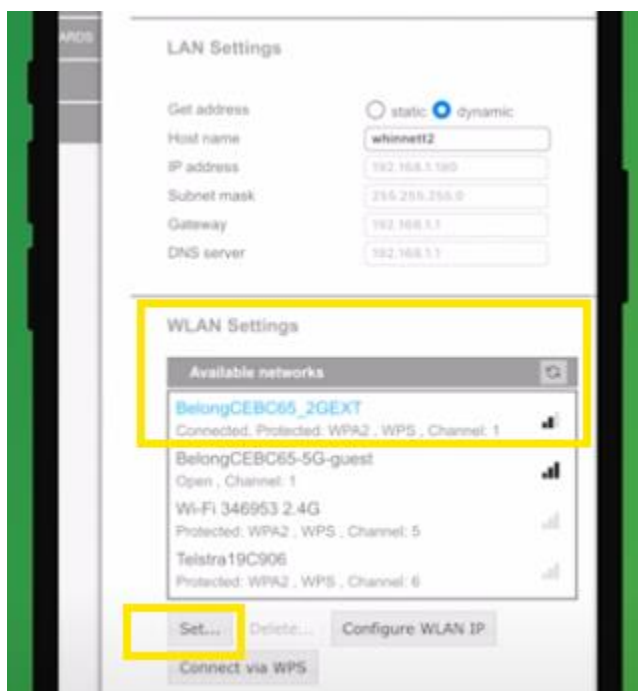




14. Enter your home Wi-Fi password and SAVE.

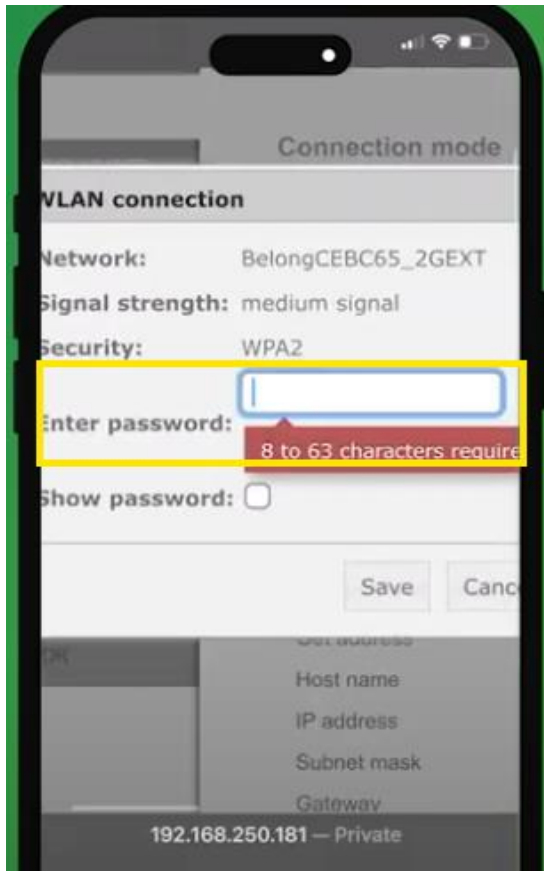


15. If successful you should see "Connected" under your Wi-Fi network.

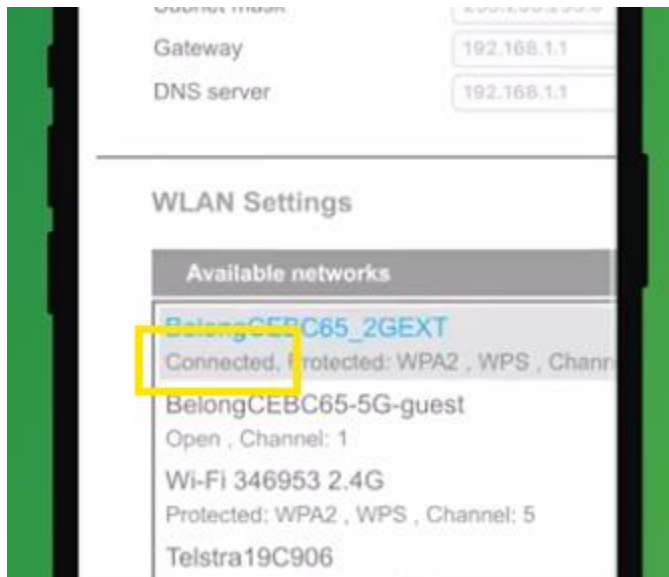



16. To finalise the Wi-Fi connection settings click the TICK in the top right hand corner –

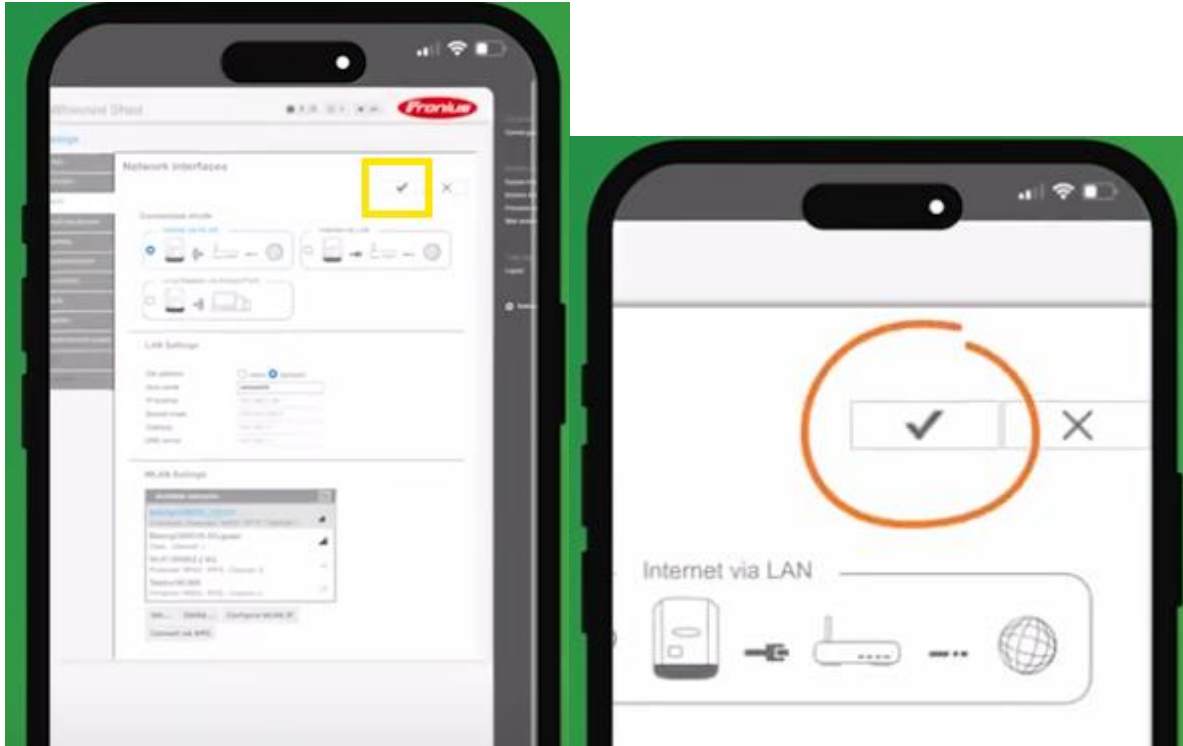

17. You can now close this web browser screen and re-connect your mobile phone to your home Wi-Fi.

18. Go back to your inverter and press the enter button to 'Deactivate the Wi-Fi AP'





19. It will show “Stopped” as a status. Which is correct. Then using the third button “back arrow” go back to the main menu. Image below.



20. Select the house icon and press 'enter', forth button. This will take you to the main solar readout screen.

